



POLYTROL®

COLOUR RESTORER

Product description	<p>POLYTROL®, which does not contain silicone, is a deep penetrating oil that restores the original look and finish to gelcoat, plastic, metal and other surfaces. Drying to a tough, long lasting, flexible finish, POLYTROL® penetrates deeply, re-wetting the pigments so restoring the colour and lustre, which have been lost through exposure to sunlight, rain and pollution. On bare metals POLYTROL® restores the shine and protects against corrosion.</p>
Properties	<ul style="list-style-type: none">• Restores the colour and appearance of dull and faded surfaces.• Revives and enhances the colour of faded marble, tombstones, slates, tiles inc terracotta tiles.• Rejuvenates flat and chalky paint work, dulled by weathering.• Eliminates the need for waxes and polishes that sit on the surface and dry out quickly.• Restores and protects the shine of polished metals.• Easy to apply - Easy to maintain.• Protects against corrosion.
Basic uses	<ul style="list-style-type: none">• Works on fibreglass (GRP), plastic, paint, tiles...• Metals - chrome, brass, bronze, stainless steel, aluminium...• Car bumpers, boats, garden furniture, shutters...• Horizontal or Vertical surfaces.
Technical data	<p>Finish: Transparent Vehicle Type: Alkyd resins Solvent Type: Solvent Viscosity: Fluid Specific Gravity (at 20°C): 0.857 ± 0.05 Physical State: Liquid Solid Content: 33% ± 2 Flammability: Not classified as flammable. Flash point: > 60°C Shelf Life: 2 years minimum in original unopened packaging. Container Size: 250mL, 500mL, 1L, 20L Colour: Amber Dry time: 24 hours depending on temperature and humidity. VOC: Out of scope</p>
Application tools	<p>Brush Cloth Abrasive Pad Wire wool (000 or 0000 grade)</p>
Good application practice	<p>Cover and protect everything you do not wish to treat. Apply between +5°C and +35°C. Do not apply in direct sunlight or on to hot surfaces. Do not allow excess POLYTROL® to dry and create a film on the surface.</p>
Surface preparation	<p>General directions Surfaces must be clean, dry and free of dirt, grease, grime and mildew. All waxes, polishes, silicone etc should be completely and thoroughly removed. Treat mildew with a 50/50 bleach/water solution. Scrub solution on to surface and allow to stand 10-15 minutes, rinse thoroughly.</p> <p>Plastic, gelcoat, tiles, painted surfaces etc Clean surface with warm soapy water or NET-TROL®*. Rinse thoroughly and allow to dry a minimum of 24 hours depending on surface.</p> <p>Stone, brick, etc Clean surface with NET-TROL®*. Rinse thoroughly and allow to dry a minimum of 24 hours depending on surface.</p> <p>Metal Clean surface with PURA-TROL* and rinse thoroughly. Leave to dry a minimum of 24 hours.</p>

Application

General directions

Always work in areas that can be completed 10-20 min.

If surface absorbs POLYTROL® unevenly i.e. matt and shiny patches move surplus oil from shiny areas to matt areas.

Wipe off excess POLYTROL® with a clean lint free cloth before it becomes tacky.

For a shinier finish, buff surface with a lint free polishing cloth.

Plastic, gelcoat, tiles, painted surfaces etc

Apply POLYTROL® liberally and evenly with a brush or cloth.

Allow to work 10-20 min.

Wipe off excess POLYTROL® with a clean lint free cloth.

Leave to dry.

Stone, brick, etc

Apply POLYTROL® liberally and evenly with a brush or cloth.

Allow to work 10-20 min.

Brush out or wipe off excess POLYTROL® with a clean lint free cloth.

Leave to dry.

Metal

Soak abrasive pad or wire wool in POLYTROL® and apply to surface with a rubbing action.

Allow to work 10-20 minutes.

Wipe surface with a cloth to remove all residue.

Buff surface with a soft, lint free cloth.

Leave to dry.

Note: POLYTROL® is not a surface coating. Its place is in the surface, not on the surface. Excess POLYTROL® that dries on the surface may be removed with DILUNETT®*.

Coverage

18 m² per litre.

Actual coverage will vary depending on application method, type, texture and porosity of the surface.

Restrictions

Do not use POLYTROL® on white surfaces.

Maintenance

Maintenance is due when POLYTROL® treated surfaces shows signs of fading. Prepare and re-treat surfaces as directed above.

Clean-up

White spirit.

Note: POLYTROL® is non-flammable, however any rags, steel wool etc soaked in POLYTROL® may spontaneously catch fire if improperly discarded. Rags, steel wool etc must be saturated with water after use or placed in a sealed, water filled metal container, before disposing with household waste. Rags may be laid flat and air dried before discarding.

Storage

Left over POLYTROL® should be transferred to a smaller, airtight, closed metal or glass container. Keep from freezing and high temperatures.

General information

Every care is taken to ensure that the information provided in this technical data sheet is accurate. **OWATROL International** is unable to guarantee results as we have no control over the conditions under which our products are applied. For further advice and information please contact our technical department by email at info@owatrol.com or the local OWATROL Agent for your country.

The information above is correct at the date of issue.

All other OWATROL products named in this document should be used as per label instructions and the technical data sheet.


Safety

Refer to the safety data sheet (MSDS) available at www.owatrol.com and text on the packaging. Keep out of the reach of children.

Issue date

April 2016

* Same manufacturer

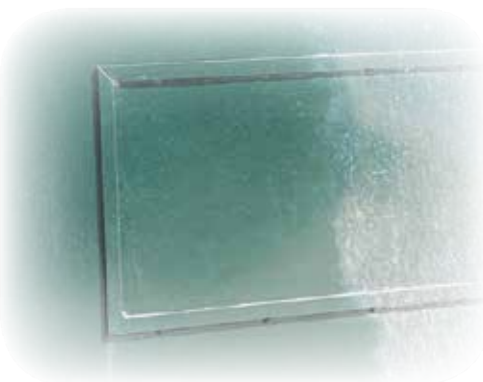

OWATROL INTERNATIONAL SLU

Barcelona - Spain

Tel. +34 93 125 88 68

Fax +34 93 106 02 13

POLYTROL® is a trademark



Find all our solutions:

www.owatrol.com